

SKID MOUNTED LASER

SPECIAL AIR COMPRESSOR

COMPOSITION

PM VSD Inverter Compressor Efficient air dryer 2*600L tank Modular adsorption dryer CTAFH 5-clase precision filter



Model	Power	Pressure	Air Supply	Туре		Outlet size	Filter level	Filtration accuracy	
Laser-30PV/16	22KW 30HP	16bar	2.0m3/min = 70.6cfm	PM VSD with Inverter	1950*1600*2180mm	G 1" =DN25	CTAFH 5-clase	Oil removal	
Laser-40PV/16	30KW 40HP	16bar	3.4m3/min = 119cfm	PM VSD with Inverter	2130x1800x2180mm	G 1" =DN25	CTAFH 5-clase	water removal dust removal	
Laser-50PV/16	37KW 50HP	16bar	4.5m3/min = 157.5cfm	PM VSD with Inverter	2130x1800x2180mm	G 1" =DN25	CTAFH 5-clase	filtration accuracy: 0.001ur	

ADVANTAGE

- \bullet Using permanent magnet variable frequency(PM VSD) screw air compressor, saving energy by 30%
- The modular adsorption dryer is used, which saves space, saves energy, has low power consumption, good pressure dew point stability, and higher efficiency in handling air compressors.
- $\bullet \ \, \text{Adopt five-stage high-precision filter, dust removal, water removal, oil removal effect can reach: 0.001 um}$
- It adopts a large-capacity air tank, 600Lx2, with a total capacity of 1200L, which provides guarantee for the stable operation of the air compressor.
- Air dryer + modular suction + five-stage filter to provide absolutely pure air and better protect the lens of the laser cutting machine
- $\, \cdot \,$ Large air supply capacity, capable of supplying air to multiple laser cutting machines at the same time



www.oppaircompressor.com


SHANDONG OPPAIR MACHINERY MANUFACTURING CO., LTD.




Skid mounted Laser compressor

20bar

Suitable for 30KW-60KW fiber/laser cutting machine



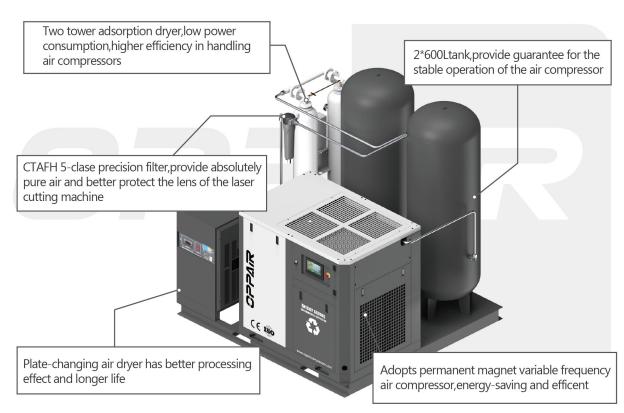

Model	Power	Pressure	Air Supply	Туре	Size (mm)	Weight	Outlet size	Filter level	Filtration accuracy	
Laser-40PV/20	30KW 40HP	20bar	2.36m3/min 34.2cfm	PM VSD with Inverter	2200*2020*2190	1090KG	G 1'' =DN25	CTAFH 5-clase	Oil removal, water removal, dust	
Laser-50PV/20	37KW 50HP	20bar	2.72m3/min 39.4cfm	PM VSD with Inverter	2200*2020*2190	1200KG	G 1'' =DN25	CTAFH 5-clase	removal, filtration accuracy: 0.001um	

